


Type:	BDC-C0	REV: 5.0
Issued:	25/04/2017	WW
Modified:	28/11/2022	KS

Basic duct cable with multitube structure and glass yarn reinforcement BDC-C0

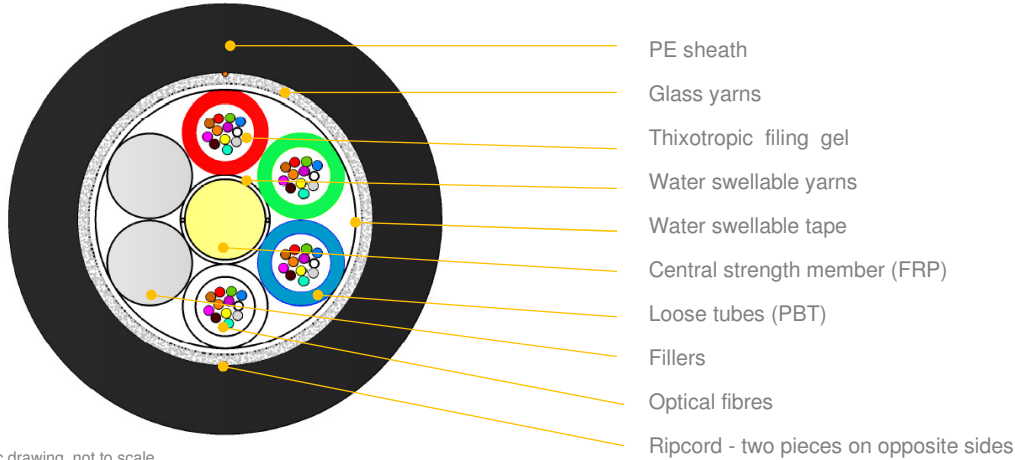

*schematic drawing, not to scale

APPLICATION

For installation into ducts
Fully dielectric
Rodent protection

DESIGN

Highly resistant, UV stabilized HDPE outer jacket
Fibre-glass yarns as a strain relief and rodent protection
SZ stranded cable core
FRP central rod
Jelly filled, PBT loose tubes (2,0mm) with optical fibres
Fillers (if applicable)
Dry cable core - water-blocking tape and/or yarns
Ripcord – two pieces on opposite sides
Sheath options: LSOH, PA etc.
Nominal outer sheath thickness 1,6mm

VARIANTS

Variant	Quantity [pcs]				Ø nominal (±5%) [mm]	Nominal weight (±10%) [kg/km]	Max short term tensile load [N]	Max long term tensile load [N]
	Fibres	Fibres per tube	Total elements	Active tubes				
1-6T x 4F	4 - 24	4	6	1-6	10,0	71	2100	1300
8T x 4F	32	4	8	8	11,2	91	2100	1400
1-6T x 6F	6 - 36	6	6	1-6	10,0	71	2100	1300
8T x 6F	48	6	8	8	11,2	91	2100	1300
1-6T x 12F	12-72	12	6	1-6	10,0	74	2000	1000
8T x 12F	96	12	8	8	11,3	97	2100	1000
12T x 4F	48	4	12	12	13,8	141	2400	1600
12T x 12F	144	12	12	12	13,8	141	2200	1100
16T x 12F	192	12	16	16	14,2	136	2200	1100
18T x 12F	216	12	18	18	14,2	147	2200	1100
24T x 12F	288	12	24	24	16,2	190	2500	1200
36T x 12F	432	12	36	36	17,5	250	2500	1200

Other designs available on demand

MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS

Crush performance:	2000 [N/10 cm]	IEC 60794-1-21-E3, $\Delta\alpha \leq 0,05$ dB, reversible
Bending radius:	Static: 15 x D Dynamic: 20 x D	IEC 60794-1-21-E6, $\Delta\alpha \leq 0,05$ dB, reversible
Water penetration:	3[m] sample, 1[m] head, 24[h]	IEC 60794-1-22-F5, no leakage
Temperature range		IEC 60794-1-22-F1, $\Delta\alpha \leq 0,05$ dB/km
Installation:	-15... +55 [°C]	
Operation:	-40... +70 [°C]	
Transport & Storage:	-40... +70 [°C]	

Type:	BDC-C0	REV: 5.0
Issued:	25/04/2017	WW
Modified:	28/11/2022	KS

OPTICAL FIBRE AND LOOSE TUBES COLOUR IDENTIFICATION

For optical fibres and loose tube identification information please see DSH_Colors_CODE_XXXX document.

FIBRE PARAMETERS

For selected post-production optical fibres parameters please see DSH_OFP document.

MARKING

The following print (hot stamped, laser or other suitable printing method) is applied at 1-meter intervals:

- Supplier: FIBRAIN
- Standard code (Product type, fibre type, fibre count)
- Year of manufacture: xxxx
- Length marking in meters
- Cable ID / Drum No

Example: FIBRAIN BDC-C0 T20 12F SM G657A1 2T6F "YEAR OF MANUFACTURE" "LASER SYMBOL" "LENGTH MARKING" "BATCH NUMBER"

The accuracy of marking is ±1%. Remarkings is in accordance with Bellcore GR 20 and supersedes earlier markings. Occasional loss of marking is possible. Cables can be supplied with a range of single mode or multimode fibres and customized print.


PACKING

Cables will be shipped on disposable wooden or treated wooden drums. Both ends of the cable will be capped and accessible for testing. Rotation direction arrow will be marked on the drum together with identification information.

DELIVERY LENGTH

2000 – 8000 meters ± 5%, with possibility of supplying up to 5% of total contract quantity as short length cables which should be above 1000 meters long. Tolerance of 5 % of order quantity shall be allowed.

ANNEX – DRAWINGS:

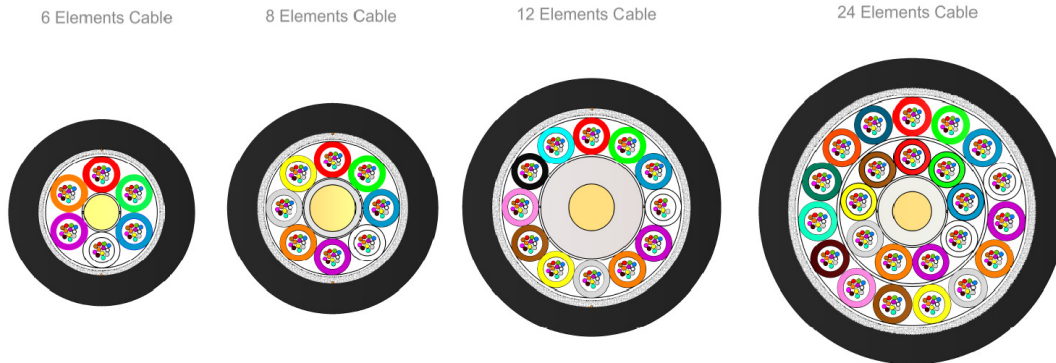

*not to scale

This document and the statements contained in it are not intended for customers within the meaning of the Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot, in any case, be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed with the Fibrain representative or distributor.