


Cat.5e F/UTP PVC+PE 4x2x24 AWG



Application

This data cable range is designed for analogue and digital signal transmission in audio, video and data applications in data communication systems supporting 100 MHz, 1.0 Gbit/s 1 Gigabit Ethernet.

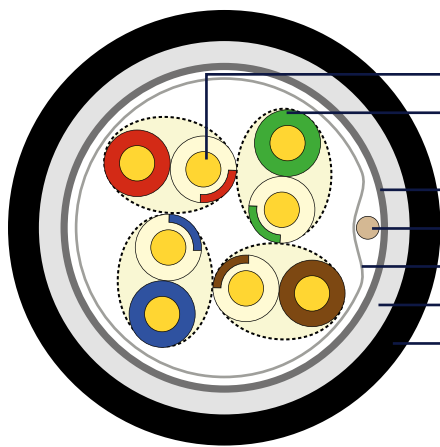

Cable structure

- **Conductor:** Copper wire 24 AWG
- **Insulation:** HDPE in compliance with TIA 568 insulation colour coding
- **Screen:** Pet tape min. 100% coverage
- **A tinned copper drain wire, Ø 26AWG**
- **Al-Pet tape** min. 100% coverage
- **Insulation:** PVC
- **Sheath:** PE RAL 9011 Black

Standards

ISO/IEC 11801-1, IEC 61156-5
EN 50288-2-1
ANSI EIA/TIA 568.2-D



DATAWAY

