


Type:	MK-DX-PE	REV: 2
Issued:	09/04/2019	AM
Modified:	12/08/2019	WW

Reinforced last mile connection µdrop cable
FIBRAIN MK-DX

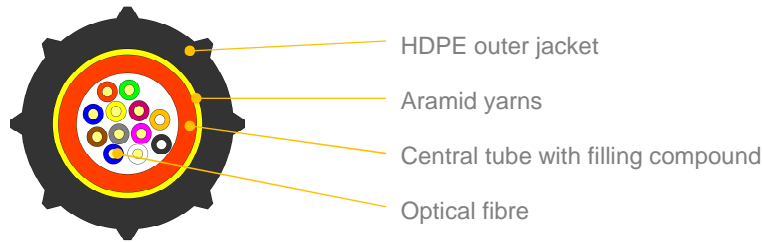

*Schematic drawing, not to scale

APPLICATION:

Installation by blowing
FTTH & last mile connection

DESIGN:

HDPE sheath with low coefficient of friction
Aramid yarns as strain relief
Central tube with filling compound
250µm coloured fibres (or 200µm / 24F)

CONFIGURATION:

Type cable	Version	Quantity [pcs]	Ø nominal (±5%) [mm]	Nominal weight (±5%)	Max allowed tension [N]
		Fibres		[kg/km]	
MK-DX18	1T x 2 - 4F	2 - 4	1,8	3,5	100
MK-DX26	1T x 12F	12	2,6	6,3	100
MK-DX26	1T x 24F	24	2,6	7,3	100

MAIN MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS

Test	Test Standard	Specified value	Requirement*
Max allowed tension	IEC 60794-1-21-E1	Load: as provided in table above	$\Delta\epsilon_t \leq 0.5\%$, $\Delta\alpha \leq 0,1$ [dB/km]
Crush	IEC 60794-1-21-E3	500 N / 100 mm, max. 15 min	$\Delta\alpha$ reversible, no significant damage
Impact	IEC 60794-1-21-E4	1 Nm, 3 impacts, R= 300 mm	$\Delta\alpha \leq 0.05$ dB after the test
Torsion	IEC 60794-1-21-E7	10N, +/- 180°, 10 cycles	$\Delta\alpha \leq 0.05$ dB, no damage
Bending performance	IEC 60794-1-21-E11	R=20x D, 10 turns, 3 cycles	$\Delta\alpha \leq 0.05$ dB, no damage
Water Penetration	IEC 60794-1-22-F5B	Sample=3m, water column=1m, 24h	no water leakage
Temp. range:	Installation	IEC 60794-1-22-F1	-5... +55 [°C]
	Operation		-40... +70 [°C]
	Transport & Storage		-40... +70 [°C]

(*) values for single-mode fibres, all optical measurements performed at @1550nm

OPTICAL FIBRE AND LOOSE TUBES COLOUR IDENTIFICATION

For optical fibres and loose tube identification information please see **DSH_Colors_CODE_XXXX** document.

FIBRE PARAMETERS

For selected post-production optical fibres parameters please see **DSH_OFP** document.

MARKING

The following print (white / laser or other suitable method) is applied at 1-meter intervals:

- Fibrain Mertojet
- Standard code (Product type, fibre type, fibre count)
- Year of manufacture: xxxx
- Length marking in meters
- Cable ID / Drum No

Example: FIBRAIN METROJET MK-DX26 12F SM G657A1 1T12F "YEAR OF MANUFACTURE" "LASER SYMBOL" "LENGTH MARKING" "BATCH NUMBER"

PACKAGING

Cables will be shipped on disposable plywood drums. Both ends of the cable will be capped, and at least one end of the cable will be accessible for testing. Identification information will be placed on a drum.

DELIVERY LENGTH

2000 – 4000 meters ± 5%, with possibility of supplying up to 5% of total contract quantity as short length cables which should be above 1000 meters long. Tolerance of 5 % of order quantity shall be allowed.