


### ON-EBXL-S2X C5e PCB Mount Box Tooless Type, STP, 2 Ports

---

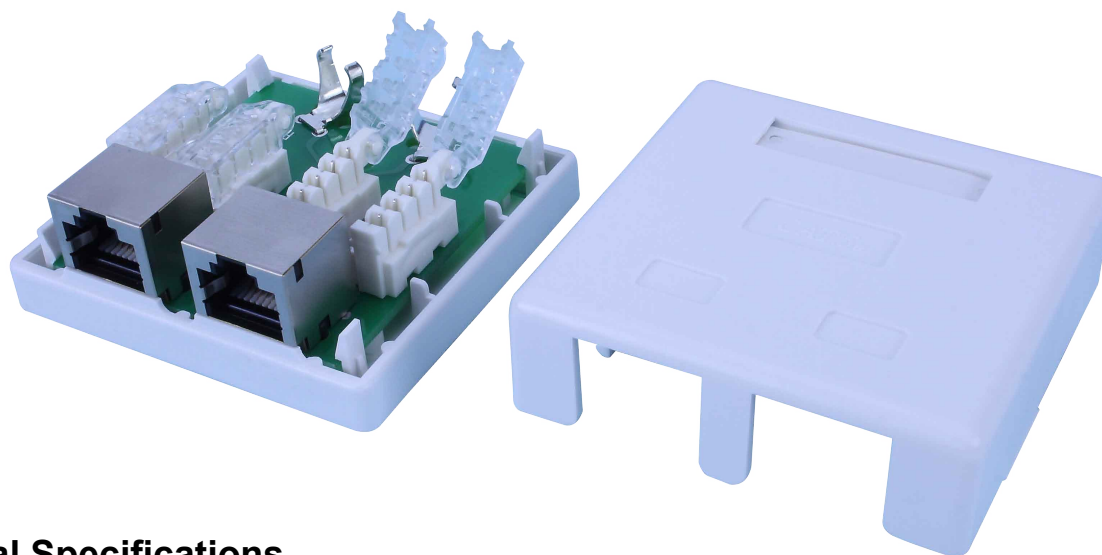

#### Electrical Specifications

Insulation Resistance : 500M ohms (min.)

Contact Resistance : 20m ohms (max.)

Current Rating : 1.5 Amps.

DC Resistance : 0.1 ohms (max.)

Withstanding Voltage : 100 VAC RMS @ 60Hz / 1 min.

#### Mechanical Specifications

IDC Punch Down Cycle : Over 250 Cycles (min.)

Jack Inerion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40°C ~ +70°C

#### Performance

Meets C5e EIA/TIA 568B Standard

#### Materials

Body	Fireproof ABS UL-94V0
Jack	8P8C 50 micro inches gold plated
PCB	FR-4 / UL-94V0
IDC Cap	Fireproof PC
IDC Body	Fireproof ABS UL-94V0
IDC Pin	Phosphor Bronze & Tinned
IDC Description	For 22-26AWG. For 110 or Krone punch-down Tool Tooless (when use IDC cap directly)