

# Double Ports Gigabite PoE++ Injector



**GNT-53011**

Output power consumption up to 60W  
 100m Transmission  
 2 RJ45


**Product Features**

Double PoE Input/Output  
 No fan, no noise, dustproof  
 5KV Lightning & 8KV ESD Protection

**Specifications**

Interface	Input Voltage: 100-240V AC @50/60Hz
PoE	Data Input/ PoE output: 2 RJ45 PoE Power Output: DC 52V/60 watts max Power Pin Assignment: Pair1: 1/2(+)/3/6 (-)
Networking Standard	EEE 802.3i 10BASE-T/IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3x Flow Control IEEE 802.3af/at/bt Power over Ethernet
Ethernet Port	Transmission Rate: 10/100M /1000Mbps Distance: 100m(Max.)
Protection	Lightning Protection:5KV. Per: IEC61000-4-5 ESD Protection:8KV. Per: IEC61000-4-2
Physical Specifications	Size(L*W*H): 112*45*32mm, Weight: 0.35KG
Protection	Lightning Protection:6KV, Per: IEC61000-4-5 ESD Protection:8KV, Per: IEC61000-4-2
Physical Specifications	Size(L*W*H): 187mm*139mm*43mm, Weight: 1.0KG
Working Environment	Operating Temperature: -30°C~55°C Storage Temperature: -40°C~85°C Humidity: 0%~95% Non-condensing
Color	Black

### PoE Injector connection diagram

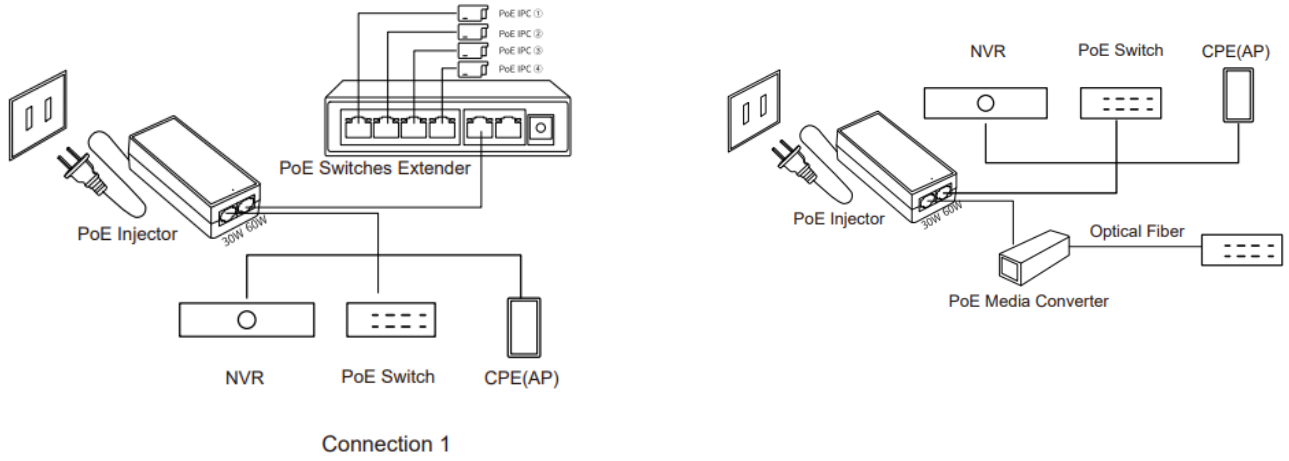

### Dimension (mm)

