

Patch panel HD, without grounding, empty



## DESCRIPTION:

- Modular configuration system:
  - Possibility for FO/Cu assembling,
  - Rear bar for cable assembling
  - Optional cable manager installed at the front,
- Capacity: 8 slots for FO/Cu insertion
- Max ports density:
  - 48 ports/1U for copper
  - 192 ports for FO (for LCdx)
- Full range of connectors:
  - RJ45/u (unshielded) – kat.5, kat.6. kat.6A
  - LCdx, SC – MM/SM

## TECHNICAL SPECIFICATION

### Material:

Frame – powder paint coated steel  
Guidance – Plastic

### Color:

Black RAL 9005

### Temperature range

-40°C do +70°C

### Ingress protection:

IP 20 zgodnie z normą PN-EN 60529.

### Weight:

1,2 kg



### Scope of supply:

Frame, empty

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary.

Type:	Patch panel	15.05.2020
		REV: 2
Ref:	XPU00	MSO

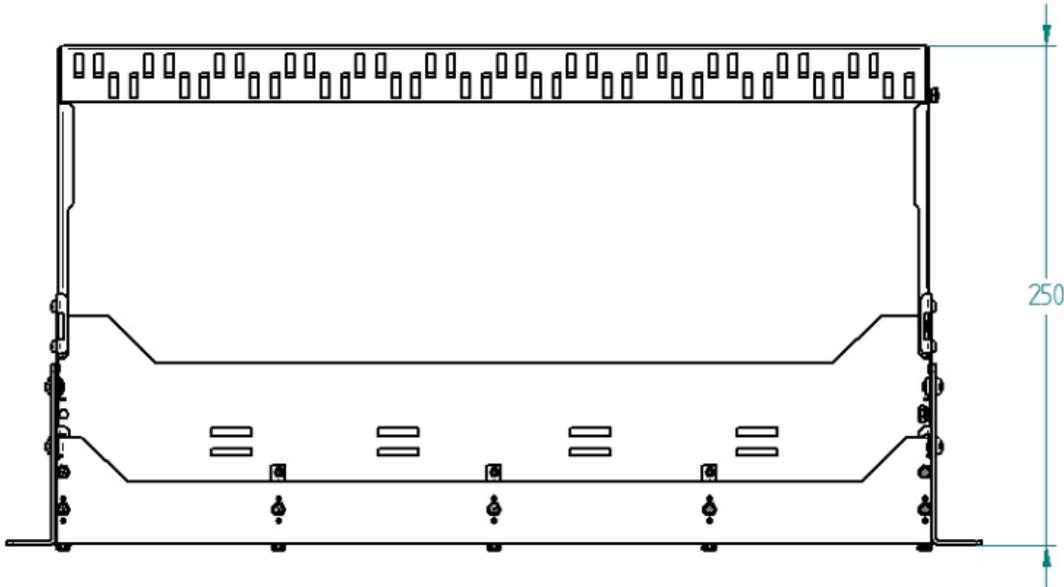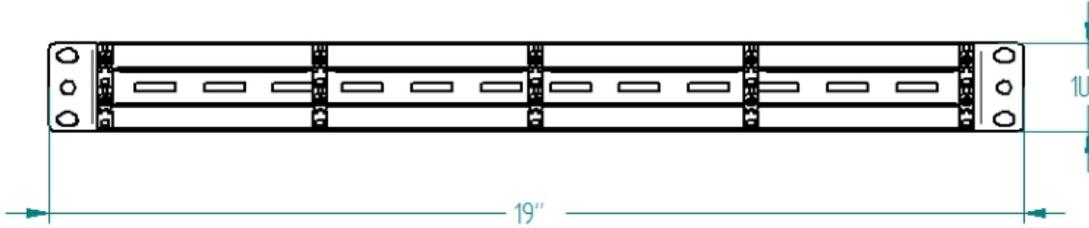

Dimensions			Reference number
Height [U = 44,45mm]	Width [inch]	Depth [mm]	
1 U	19	250	XPS00

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary. 2