

Patch panel HD for FO cassettes, empty



#### DESCRIPTION:

- Modular configuration system:
  - Possibility for FO assembling,
  - Rear basis for cable assembling
- Capacity: 4 slots for FO insertion
- Max ports density:
  - 96 ports FO with LCdx
  - 48 ports FO with SCsx
- Prepared for different type of cassettes:
  - spliced (HD SPL)
  - MPO type
  - breakout (HD BOT)

#### TECHNICAL SPECIFICATION

##### Material:

Frame – powder paint coated steel  
Guidance – Plastic

##### Color:

Black RAL 9005

##### Temperature range

-40°C do +70°C

##### Ingress protection:

IP 20 according to PN-EN 60529.

##### Weight:

0.8 kg



##### Scope of supply:

Frame, empty

##### Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary.

Type:	Patch panel	27.05.2020
		REV: 1.0
PN:	XBU00	AL

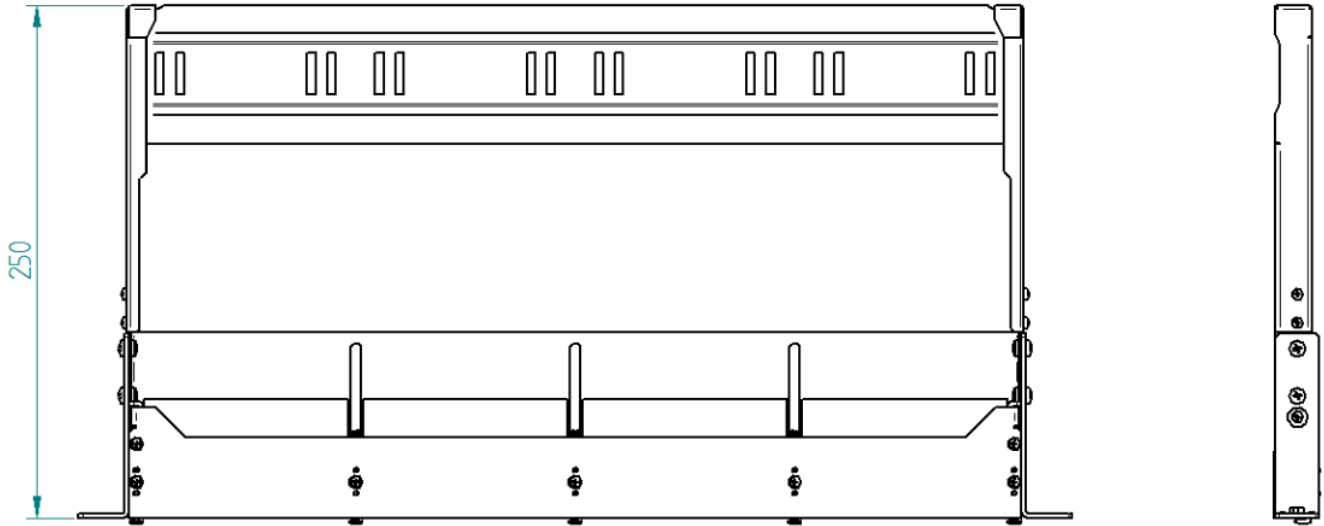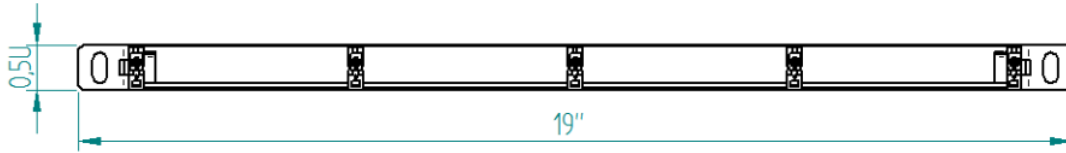

Dimensions			Reference number
Height [U = 44,45mm]	Width [inch]	Depth [mm]	
0.5 U	19	250	XBU00

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary. 2