

Holder for HD Patch panel for 6 x RJ45, screened, empty



Description:

- Flexible configuration system:
 - Modularity up to 1 port,
 - Support for all categories of Fibrain HD, screened connection modules: kat.5/s, kat.6/s, kat.6A/s
 - Method of installing connection modules: without adapter
 - Optional port labeling
 - Dedicated places for cable fastening
 - Max density: 6xRJ45/s per holder
 - Max density in HD patch panel: 8 holders per HD patch panel
-

Technical specification

Material:

Plastic

Color:

Black RAL 9005

Temperature range:

-40°C do +70°C

Ingress protection:

IP 20 acc. to EN 60529.

Weight:


0,02 kg

Scope of supply:

Empty holder

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary.

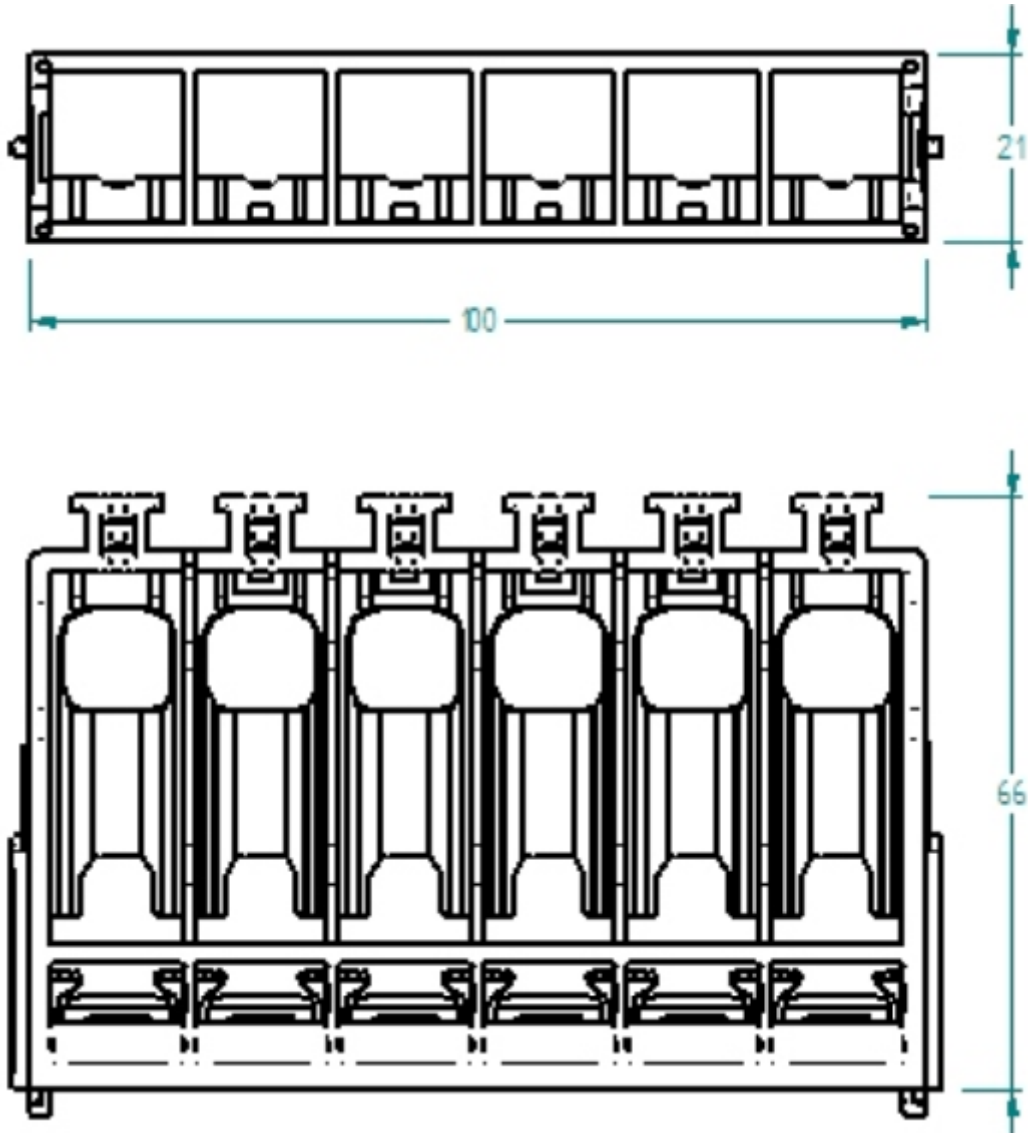

Dimensions			Reference number
Height [U = 44,45mm]	Width [mm]	Depth [mm]	
0,5	100	66	XMS00

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary. 2