


Item no.

Connector type
 For cable

Frequency Range
 Impedance (Nom.)
 Amp. Rating (measured)
 (calculated)

Product photo

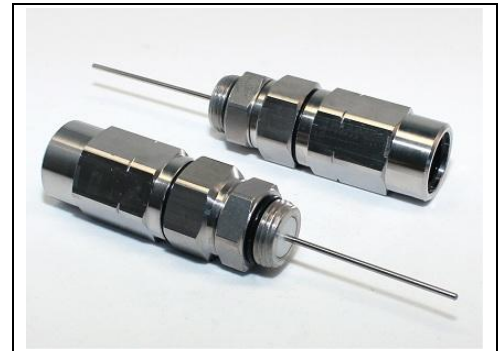

Transfer Impedance (CoMeT)

 Screening Attenuation(CoMeT)

| Return Loss (IEC 61169-1) | Better than | Typical |
|---------------------------|---------------|----------|
| | 0.3 - 500 MHz | -43 dB |
| 500 - 860 MHz | -43 dB | -46.0 dB |
| 860 - 1000 MHz | -43 dB | -46.0 dB |
| 1000 - 1750 MHz | -41 dB | -43.7 dB |
| 1750 - 2150 MHz | -37 dB | -40.0 dB |
| 2150 - 3000 MHz | -37 dB | -40.0 dB |
| | | |
| | | |

| Insertion Loss Max. | Better than | Typical |
|---------------------|---------------|----------|
| | 0.3 - 500 MHz | -0.10 dB |
| 500 - 860 MHz | -0.12 dB | -0.07 dB |
| 860 - 1000 MHz | -0.12 dB | -0.07 dB |
| 1000 - 1750 MHz | -0.16 dB | -0.11 dB |
| 1750 - 2150 MHz | -0.18 dB | -0.13 dB |
| 2150 - 3000 MHz | -0.21 dB | -0.16 dB |
| | | |
| | | |

Temperature
 Installing
 Operating
 Storing

Intermodulation
 3rd Order (@2x+37dBm)

Inner Conductor Resistance
 (@ 1 A DC)

Sealing Test
 (IEC IP-code)

Insulation Resistance
 (@ 500 VDC)

O-rings

Dielectric Strength
 DC Test Voltage

Base Material
 Body Parts
 Inner Conductor

Max. Tensile Strength
 Overall
 Inner Conductor

Plating
 Body Parts
 Inner Conductor

Torsional Strength
 (Connector / Cable)

Insulators

Test performed by
 Date of release

Remarks

*All tests performed using instruments calibrated in accordance to our ISO 9001 certification.
 Further technical specifications and installation instructions can be obtained on request.*